



User Instruction & Installation Manual

Voyager Remote Control Tungsten Halogen Searchlight



Product Reference Number:

A2645 – VH330 WHITE LV 250w
A2648 – VH330 MIRRORRED STN.S (CHROME) LV 250w
A2669-VH330 WHITE HV 250w
A2671-VH330 MIRRORRED STN.S (CHROME) HV 250w

Manufacturers details:

Francis Searchlights Ltd
Union Road, Bolton
Lancashire, BL2 2HJ, UK
Tel: +44 (0) 1204 558960
Fax: +44 (0) 1204 558979
<http://www.francis.co.uk>
E-mail: sales@francis.co.uk

Distributor details:

Manual Part Number: C24090

Issue : 3 25/6/10

CONTENTS

- 1 - Introduction
- 2 - Safety Precautions
- 3 - Technical Information
- 4 - Unpacking and Installation Instructions
- 5 - Electrical Installation
- 6 - Operating Instructions
- 7 - Fault Finding
- 8 - Maintenance and Servicing
- 9 - Wiring Diagrams & General Assembly
- 10 - Spare Parts List

1 - Introduction

It is imperative that this manual is read carefully and understood before installing your equipment. For your future reference please keep this manual in a safe place.

Thank you for specifying a product from the Francis Searchlights range. All Francis products are designed to give complete customer satisfaction and are manufactured to the highest engineering standards in order to ensure optimum performance and service life.

The Francis range combines features proven over many years service in the most hazardous conditions in both marine and land installations.

In order to prolong the life and performance of your product, we recommend that you only specify Francis Searchlights spare parts. This will also ensure that any warranties on your equipment will not be invalidated. Information on spares ordering and parts is provided in this manual.

Should you ever need to contact Francis Searchlights Ltd. regarding your equipment, please quote the Product Serial Number at all times.

2 - Safety Precautions

The following instructions must be adhered to, in order to ensure a safe working environment and the safety of the user.

Note: When unpacking or manoeuvring the searchlight into its fixing position, suitable lifting points must be used in order to prevent damage to the equipment or personal injury.

- Prevent rain, snow, condensation and water droplets from contacting the lamp as this may cause bulb failure and possible shattering;
- Quartz halogen bulbs run with a high internal pressure in excess of atmospheric. Whilst the construction is inherently strong, there is a slight risk of the bulb shattering;
- Never look directly into an illuminated searchlight as this may cause severe damage to eyesight. If it is necessary to inspect a lamp whilst in operation, always wear suitable protective goggles;
- Should it be necessary to examine the lamp with the front bezel removed, always use a protective shield and wear goggles to ensure a safe working environment;
- Never attempt to clean a lamp whilst in use;
- Searchlights get hot. Never touch the unit when lit and always allow 15 to 20 minutes for cooling down after turning the searchlight off;
- Never place anything on or cover the searchlight when in use;
- Ensure the lamp has cooled sufficiently before removal;
- If undue force appears necessary to remove the lamp, the equipment should be inspected by a competent person or contact the manufacturer;
- When breaking a lamp for disposal, care must be taken to ensure the glass fragments are safely contained. This operation must be performed out of doors in free air. In all circumstances refer to the lamp manufacturers instructions packed with the lamp;
- Due to the vast range of lamps available it may appear possible that more powerful lamps can be used in the equipment than for which it was designed. Even when the unit will physically accept a higher wattage or voltage lamp, this substitution is not recommended and is dangerous. This action will also void any warranties on the equipment.

Always refer to the lamp manufacturers technical data when dealing with lamps.

3 - Technical Information

This product has been designed to operate in accordance with the product specification. The VH330 RC searchlight has the following features:

- All marine grade materials and fixings;
- Parabolic glass reflector;
- Stove enamel painted or Mirrored 316 Stainless Steel (Chrome);
- 350° horizontal rotation;
- Vertical movement +20° to -20°;
- Motor speed 2°- 20°/sec (Pan), -10°/sec (Tilt);
- Remote focus facility;
- Self Regulating internal heater;
- Toughened front glass;
- Sealing to IP66;

The 24v searchlight also performs to the following optical data:

	<u>250 Watt T/H</u>	<u>250 Watt T/H</u>
■ Supply voltage	24v	24v
■ Peak Beam Candlepower	2,220,000 lux	1,532,000 lux
■ Range	1490 metres	1238 metres
■ Divergence	3°	3°
■ Temperature range	-50°C	-50°C
■ Lamp Life	300 hours	2000 hours

In order that the searchlight operates correctly it is imperative that competent personnel are responsible for the installation, operation and servicing of this equipment. Failure to adhere to this advice may cause premature failure or incorrect operation of the searchlight, which may damage the equipment or cause personal injury.

4 - Unpacking and Installation Instructions

The following instructions should be read and fully understood prior to installing the equipment to ensure that the correct procedures are followed and all safety precautions are observed.

Note: If the equipment has been in storage for a considerable amount of time, it is advisable to conduct a routine maintenance check on all parts before installation.

Safety Precautions

This equipment should not be connected to an electrical supply before being installed. Installation procedures should be adhered to in order to ensure a safe working environment and reduce the risk of damage or personal injury.

Preparing the Mounting Position

Mark out and drill the fixing holes through the deck. When in the desired position, fit the base gasket supplied and fasten the searchlight firmly down. On an uneven surface it may be necessary to use a suitable sealant such as silicone, in order to ensure a weatherproofed joint. If no cabling is required to be seen on deck there is the option to wire from underneath the base directly into the deck. See drawing A2645 for details.

5 - Electrical Installation

For safety purposes, only competent personnel should perform the electrical installation. All equipment should be installed to current Electrical Regulations and Standards.

In order to obtain the maximum light output from the searchlight, it is essential that the full operating voltage of the lamp fitted be applied to the lampholder contacts.

Method of Electrical Connection

- 1) Disconnect the supply before working on the electrical system;
- 2) The searchlight must be connected to a fused electrical supply, using suitably sized cable;
- 3) If the searchlight is located a considerable distance from the supply, provision must be made in the cable size in order to overcome the voltage drop. The following table should be used for indication purposes only:

Searchlight	24v 250w
Cable Size (mm ²)	Distance Max
2.5	5 MTRS
4	8 MTRS
6	12 MTRS
10	20 MTRS

- 4) Whenever possible cable terminations should be made below deck and with approved terminal devices;
- 5) If a spare auxiliary fuse or circuit breaker is not available, one of the correct type and rating should be fitted and connected to a positive supply. It is advisable to locate a bus bar or main connection and avoid any direct connection to the supply:

Note: This equipment must be earthed.

Optional Slave Panel Wiring

12 core 0.5mm² cable from the Slave Panel to the Junction Box.

NOTE both panels MUST NOT be operated simultaneously as this may damage the equipment

Installation Guidelines

A typical installation and connection routine for the VH330 RC 24v supply searchlight is as follows:

Referring to wiring diagram C23975, a supply is fed to the junction box (control devices), which then provides a common feed to the searchlight and joystick panel.

The searchlight to junction box has been pre-wired with 3 meters of 12 core 0.5mm and 3 core 2.5mm cable. The only cables that needs to be supplied by the customer are the 12 core 0.5mm cable from the Joystick panel to the junction box and the mains cable.

A typical installation and connection routine for the VH330 RC 240v supply searchlight is as follows:

Referring to wiring diagram C24091, a supply is fed to the junction box (control devices), which then provides a common feed to the searchlight and joystick panel.

The only difference between the 240 volt version and the 24 volt version is the step down transformer fitted in the junction box.

The searchlight to junction box has been pre-wired with 3 meters of 12 core 0.5mm and 3 core 2.5mm cable. The only cables that needs to be supplied by the customer are the 12 core 0.5mm cable from the Joystick panel to the junction box and the mains cable.

A typical installation and connection routine for the VH330 RC 115v supply searchlight is as follows:

Referring to wiring diagram C24092, a supply is fed to the junction box (control devices), which then provides a common feed to the searchlight and joystick panel.

The only difference between the 115 volt version and the 240 volt version is the wiring of the step down transformer fitted in the junction box.

The searchlight to junction box has been pre-wired with 3 meters of 12 core 0.5mm and 3 core 2.5mm cable. The only cables that needs to be supplied by the customer are the 12 core 0.5mm cable from the Joystick panel to the junction box and the mains cable.

6 - Operating Instructions

This equipment is designed for use out of doors, in free air. Never place anything on, or cover the searchlight when in use as this may present a hazard.

The searchlight can be remotely positioned via the joystick control panel, with the facility for movement up, down, left and right.

The pan speed can be adjusted using the potentiometer mounted on the joystick panel. The movement increases from 2° to a maximum of 20°/sec when turned clockwise. The tilt speed runs at 10°/sec and cannot be adjusted.

The beam of the searchlight can be adjusted to give a variety of beam types. Using the yellow remote focus button on the joystick panel, the desired beam can be achieved for any particular application. The beam will move continuously through 'spot' to 'flood'. In order to fix the beam type; simply release the button at the desired position.

The heaters specified on this equipment are self-regulating and will shut off when they reach the dew point temperature.

Key Fob Operation

The searchlight has the additional feature of a wireless key fob, which allows the user to operate the light from a maximum distance of up to 30 metres. The key fob has an 8-way direction control and the facility to switch the light on/off. To activate the key fob simply hold down the on/off switch for a few seconds, while powering up junction box. The searchlight can have a maximum of four key fobs all working independently from each other. The above procedure must be repeated when adding additional key fobs. When not in use the key fob will go into a sleep mode.

There is the option for added slave panels, the slave panel has all the features of the main panel ie joystick, speed control focus and on/off.

NOTE both panels MUST NOT be operated simultaneously as this may damage the equipment

This product should not be used for any purpose other than for which it was designed. Any modifications to the product should not be undertaken without consulting the manufacturer.

Setting to Work

Safe service in use necessitates the strict observance of the following precautions.

- Any article fabricated from quartz or glass is inherently fragile and care should therefore be taken, at all times, when handling lamps;
- Eye protection must be worn when handling lamps that have been removed from their packaging materials. The protective jacket should not be removed from the lamp for safety reasons, as there is a remote possibility of the lamp shattering violently, especially if it is subjected to mechanical shock or vibration;
- Always isolate the equipment from the supply before inserting a lamp;
- Before inserting the lamp ensure that all contacts are clean. Contacts must be renewed at the slightest sign of corrosion. Sanding or filing down corroded areas is not recommended as this will only make the conducting surface between the pin and lampholder smaller, thus causing the lamp to overheat;
- Do not twist or bend the fused quartz bulb when fitting the lamp as mechanical stresses MUST be avoided;
- The lamp must be capable of unimpeded expansion when it warms up to operating temperature. Mechanical forces must not be applied to the fused quartz bulb;
- Before the protective jacket is removed, suitable protection must be worn i.e face mask and gloves with wrist protection;
- Never touch the quartz bulb with bare hands, as fingerprints will make the glass cloudy and cause a severe loss of light. This may also cause recrystallisation and thus weaken the bulb material. Should the bulb be inadvertently touched, remove fingerprints with methylated spirit and a clean, soft paper towel. The bulb should then be wiped with distilled water. NOTE: ALWAYS WEAR MASK AND GLOVES DURING CLEANING);

In all circumstances the lamp manufacturers data should be referred to when dealing with lamps.

When fitting the lamp:

- Always isolate the equipment from the supply when inserting a lamp;
- Ensure the circuit is suitably fused;
- Ensure the lamp is of the correct power rating and type;
- Check lampholder is in good condition. If the contacts show any sign of corrosion, replace the lampholder;
- Check the lampholder is in a good dry condition. Never allow water to collect in the lamp fitting or come into contact with the lamp.

To fit the lamp:

- Loosen all the socket screws on the front of the searchlight, remove the bezel and glass and store in a safe place;
- Cut open one end of the protective sleeve surrounding the lamp;
- Using the sleeve to prevent the fingers coming into contact with the lamp, position the two pins above the holes in the lampholder;
- Gently push the lamp into the lampholder and remove the protective sleeve;
- Replace the front bezel and glass, ensuring the socket screws are securely fastened.

Testing

Upon correct installation and connection to an electrical supply, the equipment can be tested in order to ensure its' correct performance. A competent person with some knowledge of electrical equipment must carry out this work.

Equipment required: Multi-meter with leads
 Ammeter

Using the equation $P=VI$, the approximate power output of the equipment can be calculated in the following way:

- Using the multi-meter, take a voltage reading from the terminal block inside the searchlight;
- Using the ammeter, take an amps reading from the live cable to the lamp;
- Multiply these figures together to give an approximate wattage (Power output).

For example:

Using a 24v 250w Tungsten halogen lamp:
Voltage reading = 24v; Amps reading = 10 amps

Therefore, Wattage = $24 \times 10 = 240$ watts

7- Fault Finding

All fault finding must be conducted by a competent person or qualified Electrical Engineer.

Failure of Lamp to light

Causes:

- 1) Power not supplied;
- 2) Fuse blown;
- 3) Failed lamp;

Remedy:

- 1) Check voltage at supply. If supply is not present the fault is at the customer supply. If power is present, see remedy 2;
- 2) Check fuse for visual failure. If none noticeable check fuse for continuity using a multi-meter. If fuse found to be faulty, replace with new part and test equipment again for correct working order. If found to be working correctly see remedy 3;
- 3) Firstly, check supply at lampholder connecting block (within searchlight body). If supply is present, disconnect unit from power supply before removing the lamp. If noticeable damage to filament is present, the lamp will have failed. The lamp can also be checked for continuity using a multi-meter. Replace lamp ensuring all precautions and instructions previously outlined in this manual are adhered to.

Failure of Remote Focus

Causes:

- 1) Power not supplied;
- 2) Faulty connections;
- 3) Failed motor;

Remedy:

- 1) Check voltage at supply, output of the step down transformer and the output from the control board in the junction box. If no supply present fault is at customer supply. If power is present see remedy 2;
- 2) Check all wiring connections on motor and terminal block in accordance with the wiring diagram. If found to be correct, see remedy 3;
- 3) Remove the focus motor and apply 24v DC directly across terminals. If motor does not rotate the unit has failed. A new focus motor should be fitted to the lampholder assembly.

8 - Maintenance and Servicing

In order to prolong the service life and performance of your searchlight, the following maintenance guidelines are recommended:

- Maintenance checks should be conducted before every voyage or at least every three months;
- Before checking, disconnect the equipment from the supply;
- Visually inspect the condition of the equipment;
- Any major or minor structural damage should be rectified immediately in order to reduce sympathetic wear;
- After inspection it may be necessary to clean the inside of the searchlight. The following procedure should be adhered to:
 - Remove the front bezel;
 - Clean the front glass inside and out using a proprietary glass cleaner or metal polish;
 - Clean the reflector if required;
 - Ensure that the lampholder is free from corrosion or other damage;
 - Check earthing point for conductivity;
- The body of the mirrored stainless steel version can be cleaned to keep its chrome look using a metal polish and a lint free cloth.
- It is advisable to check all seals and gaskets for signs of degradation. Renew if necessary;
- The searchlight is fitted with a breather unit. This ensures a steady airflow in order to prevent any vacuum forming within the barrel.
- Upon completing all maintenance requirements the searchlight should be tested for full working order (approximately 20 minutes).

If in any doubt as to the correct servicing procedures to adopt please contact your distributor/agent or the manufacturer who will be able to advise the best course of action for your product.


9 - Wiring Diagrams and General Assembly

Drawing Number	Description
C24237	Wiring Diagram 24v Supply (Without Wireless Remote Control)
C23975	Wiring Diagram 24v Supply
C24091	Wiring Diagram 240v Supply
C24092	Wiring Diagram 115v Supply
C23949	Slave Panel Wiring Diagram
C24497	<u>Multiple</u> Slave Panel Wiring Diagram
A2645	VH330RC General Assembly Drawing
C23991	Joystick Control Panel
C24263	Joystick Control Panel (Without Wireless Remote Control)
C23976	Joystick Control Panel Main Slave & Slave
C24261	Junction Box L.V (Without Wireless Remote Control)
C24111	Junction Box L.V
C24095	Junction Box H.V

FIRST USED ON
LW
R3
R3

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

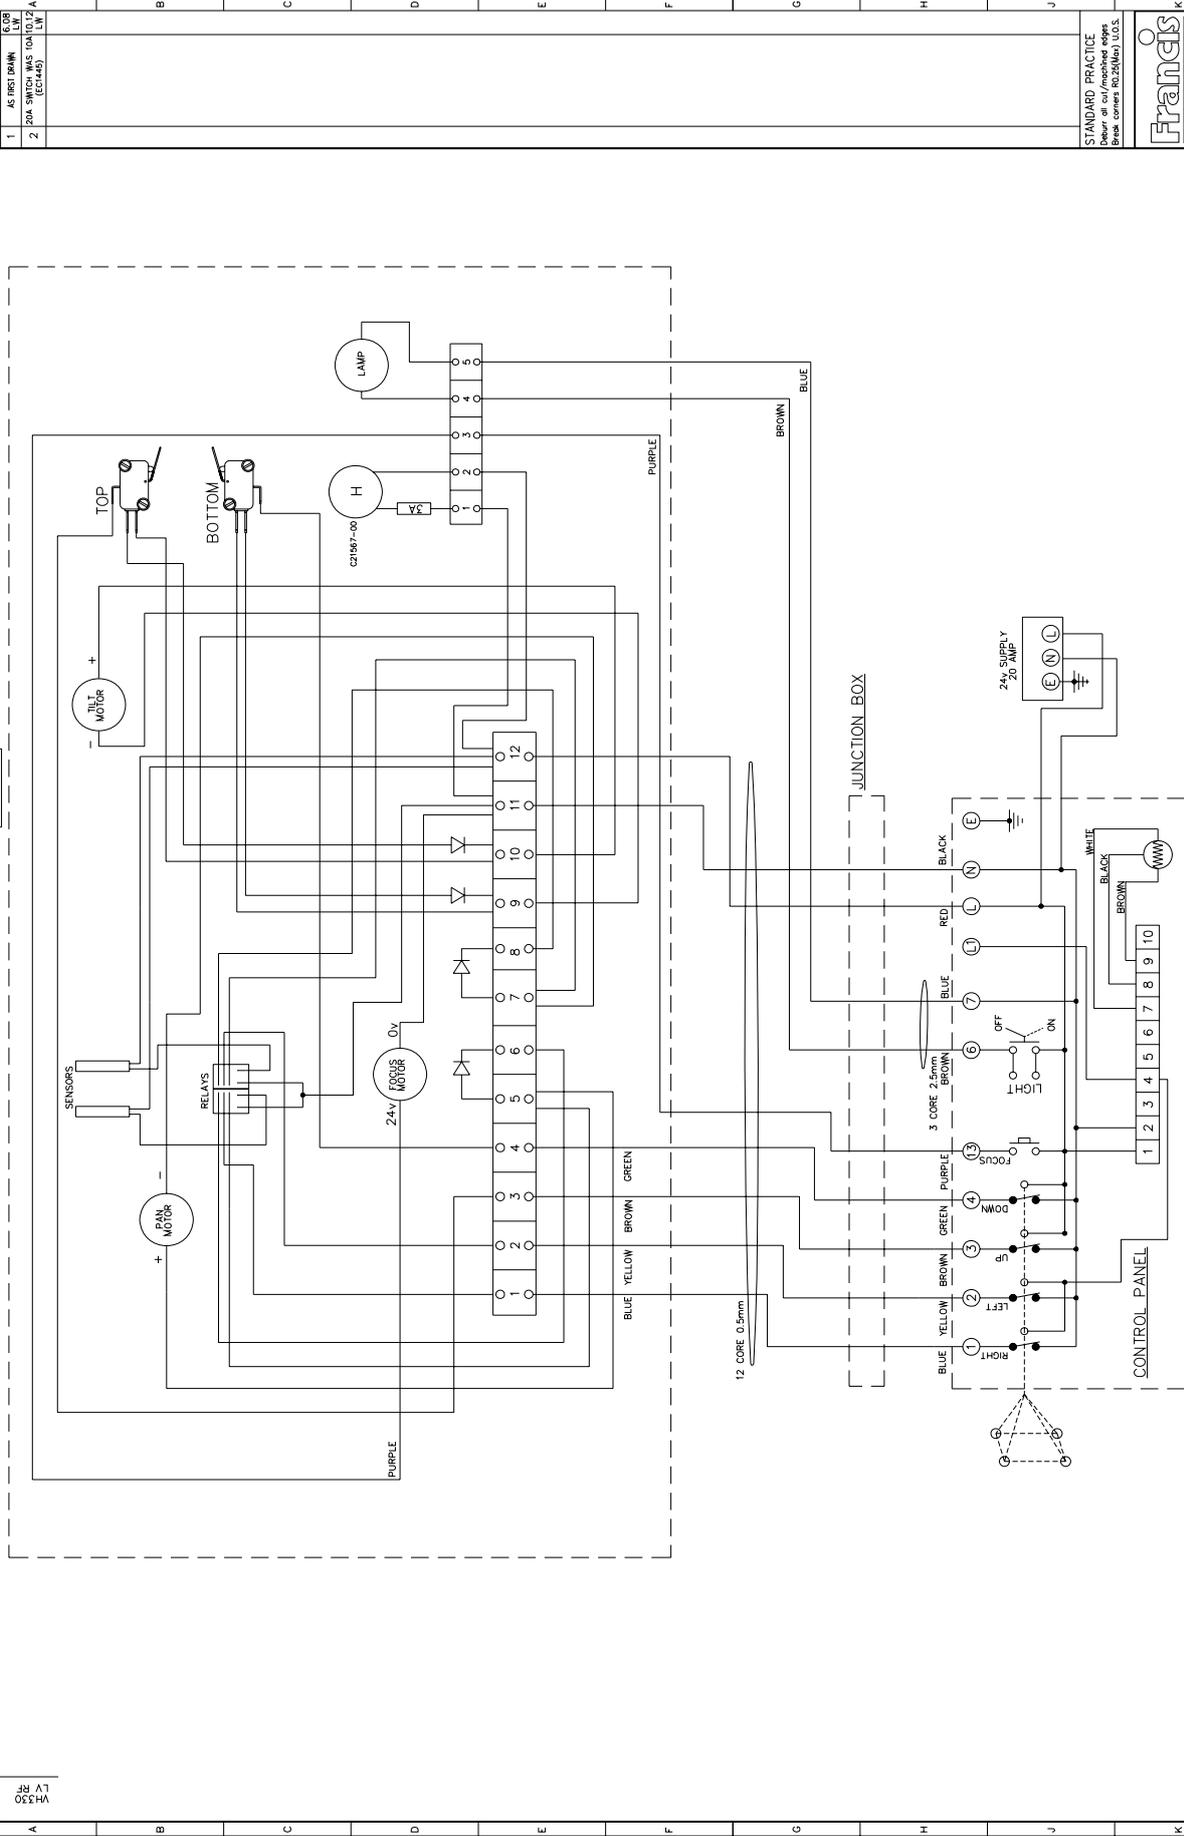

ISS No	16	DATE	4
MODIFICATION DETAILS			
1	AS FIRST DRAWN		
2	20A SWITCH WAS 10A (0.12 A (CCH45))		

STANDARD PRACTICE
As per Francis
Break covers (R0.25(Msp)) U.O.S.

Francis
SEARCHLIGHTS

© 2008 AT CONT ON SHEET
PART No./REV. No.

SHT
C24237

1

16

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

FRANCIS SEARCHLIGHTS LIMITED · UNION ROAD · BOLTON · BL2 2HJ

DESCRIPTION

VH330 WIRING DIAGRAM WITHOUT WIRELESS REMOTE L.V. RF 24v SUPPLY

FINISH

MATERIAL


Spd Coating: To ISO 8602 C10
Die Coating: To ISO 8602 C7B
Hole centres & points: ±

TOLERANCES

General: ±
Angular: ±

SCALE

ALL DIMENSIONS IN MILLIMETRES

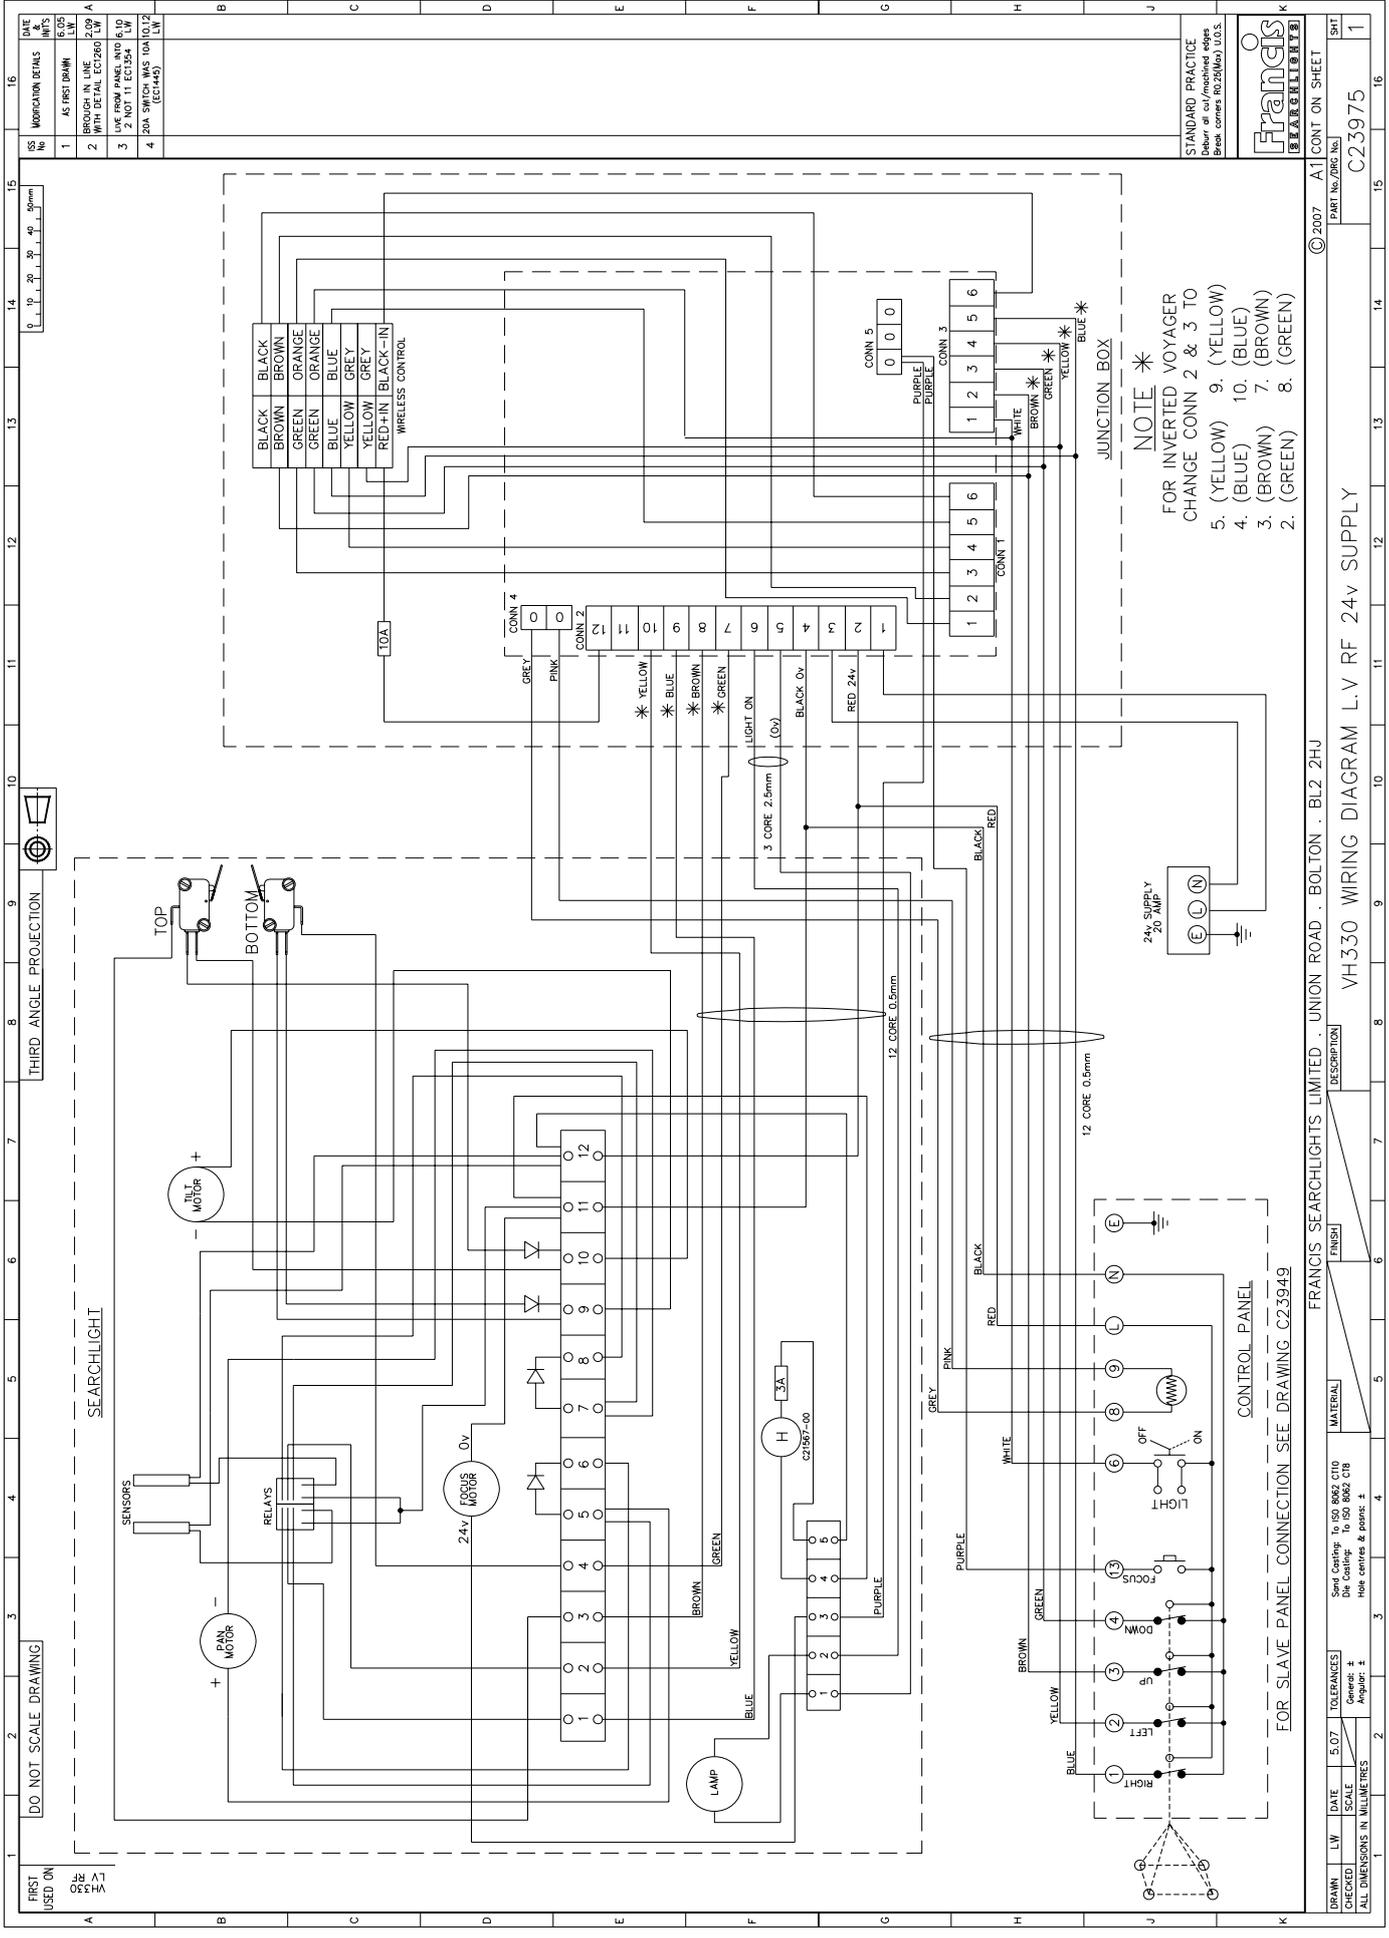

REV	DATE	DESCRIPTION
1	16/05/07	AS FIRST DRAWN
2	22/05/07	BROUGHT IN LINE WITH DETAIL EC1260 L.V
3	22/05/07	LIVE FROM PANEL AND 16, 10
4	22/05/07	20A SWITCH WAS 10A, 10, 12, 16

STANDARD PRACTICE
 Break centres to 25mm (10.00 in.) U.S.

Francis
 ELECTRICAL

© 2007 A1 CONT ON SHEET
 PART No./REV No)
 C23975

DO NOT SCALE DRAWING

SEARCHLIGHT

FIRST USED ON
 VH330
 LV RF

THIRD ANGLE PROJECTION


FOR SLAVE PANEL CONNECTION SEE DRAWING C23949

NOTE *
 FOR INVERTED VOYAGER
 CHANGE CONN 2 & 3 TO
 5. (YELLOW) 9. (YELLOW)
 4. (BLUE) 10. (BLUE)
 3. (BROWN) 7. (BROWN)
 2. (GREEN) 8. (GREEN)

REV	DATE	DESCRIPTION	FINISH	MATERIAL
1	16/05/07	SEARCHLIGHTS LIMITED UNION ROAD . BOLTON . BL2 2HU		
1	16/05/07	VH330 WIRING DIAGRAM L.V RF 24V SUPPLY		

REV	DATE	SCALE	TOLERANCES
1	16/05/07	1:50	±0.07
1	16/05/07	1:50	±0.07

Scale Centre to ISO 9001
 Draw Centre to ISO 9001
 Hole centres & points ±

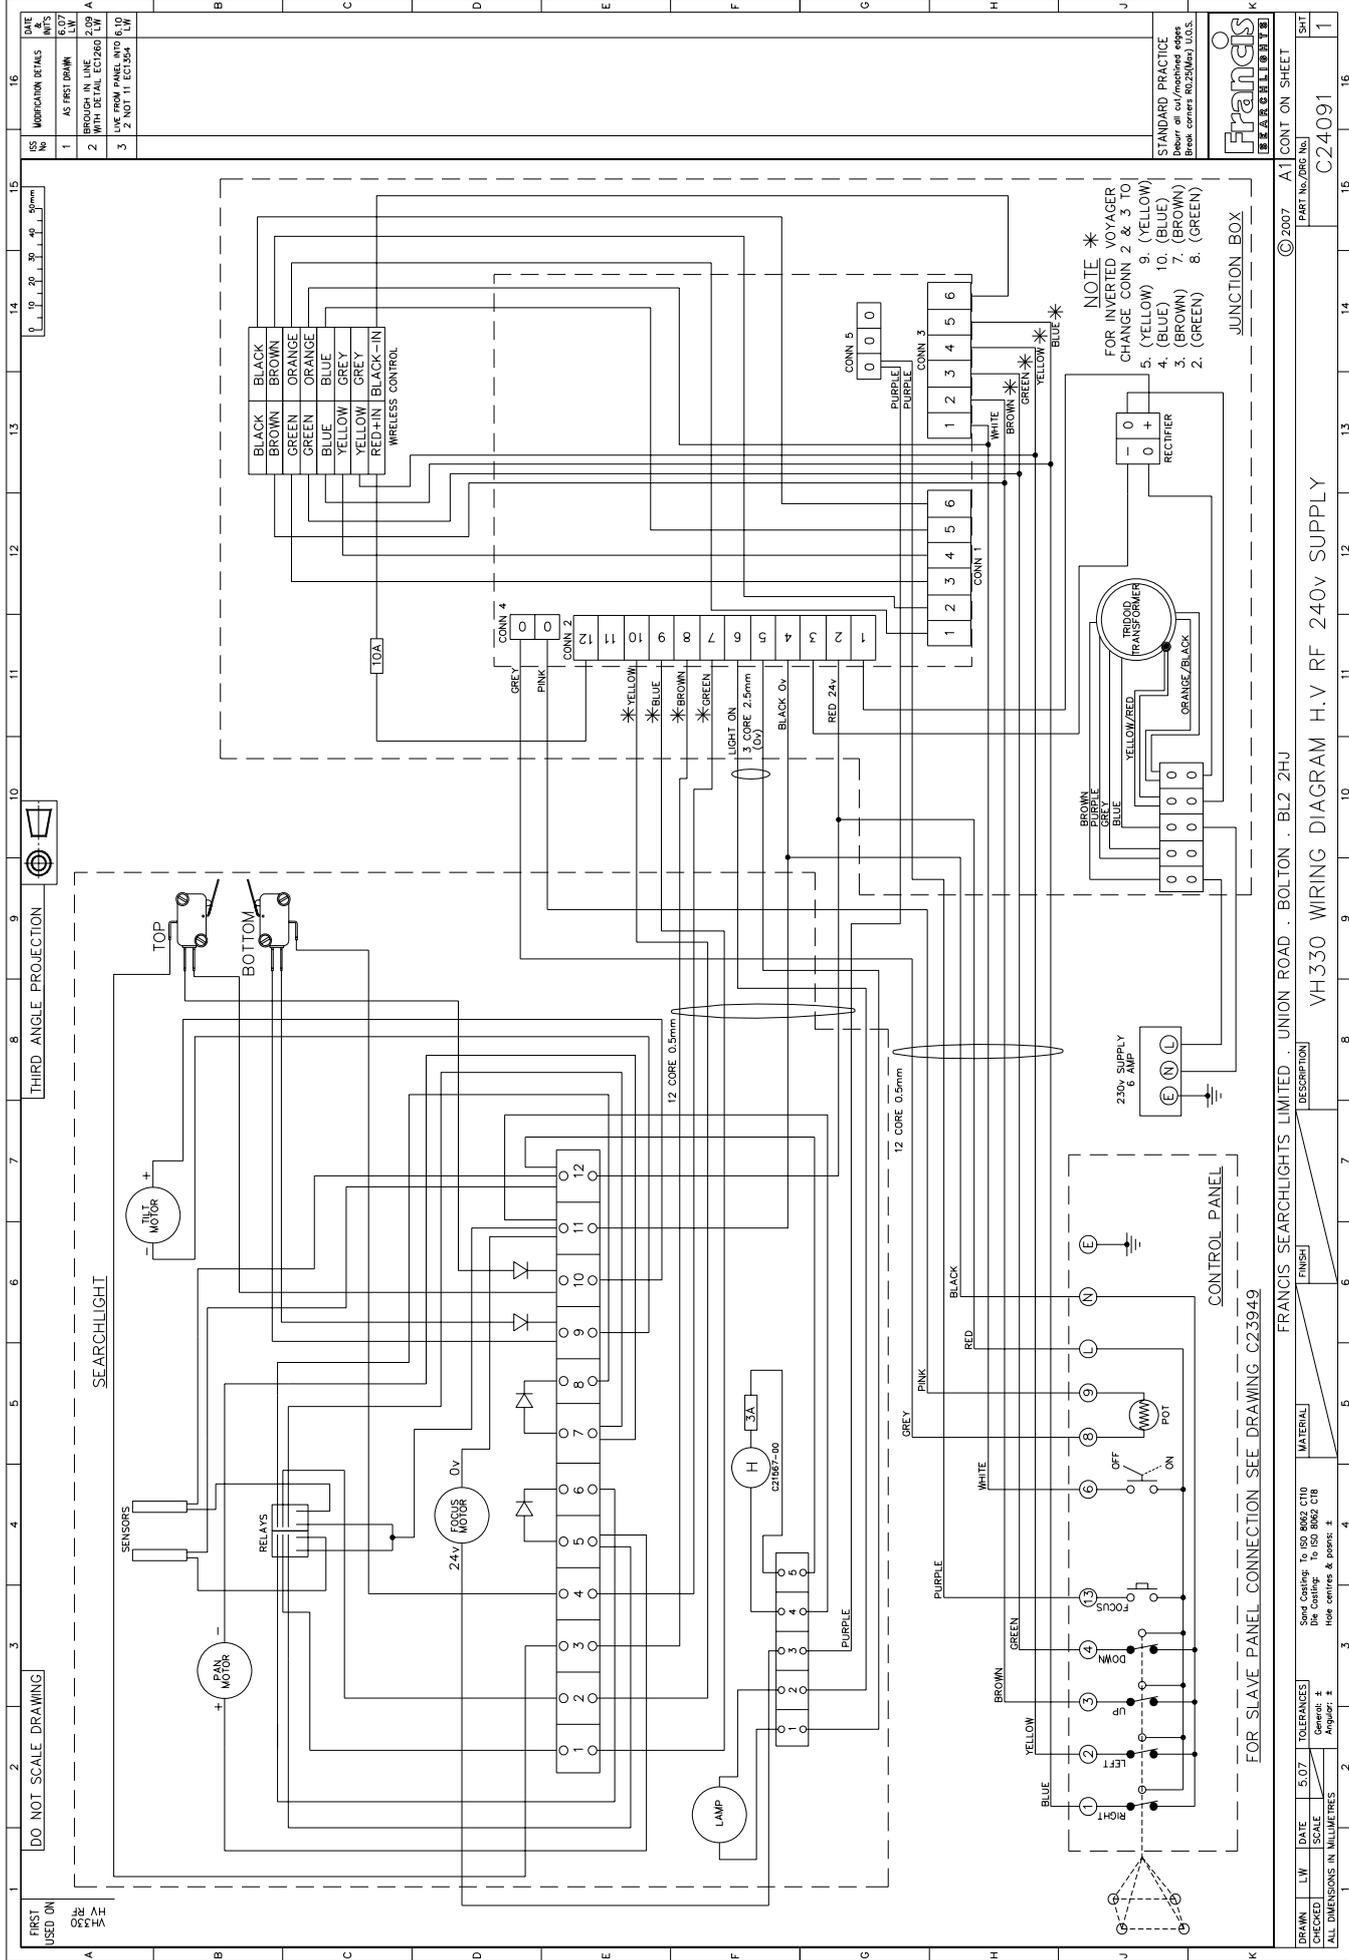

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

SEARCHLIGHT

CONTROL PANEL

JUNCTION BOX

NOTE *
FOR INVERTED VOYAGER!
CHANGE CONN 2 & 3 TO
5. (YELLOW) 9. (YELLOW)
4. (BLUE) 10. (BLUE)
3. (BROWN) 7. (BROWN)
2. (GREEN) 8. (GREEN)

STANDARD PRACTICE
Drawn at our/machined edges
Break corners R0.2(Min) U.O.S.

REV	DESCRIPTION	DATE
1	AS FIRST DRAWN	6.07
2	BROUGHT IN LINE WITH DETAIL EC2400	2.09
3	LIVE FROM PANEL INTO 6.10 2. NOT 11. EC2354	6.10

1	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
A	B	C	D	E	F	G	H	J	K							

DRAWN	LW	DATE	5.07	TOLERANCES	General: ±
CHECKED	SCALE	1:1	Die Casting:	±	Angular: ±
ALL DIMENSIONS IN MILLIMETRES					

Send Coating: To ISO 8062 C10
Die Coating: To ISO 8062 C10
Hole centres & pitch: ±

FRANCIS SEARCHLIGHTS LIMITED · UNION ROAD · BOLTON · BL2 2HJ

DESCRIPTION: VH330 WIRING DIAGRAM H.V RF 240V SUPPLY

FINISH: _____

MATERIAL: _____


© 2007 A1 CONT ON SHEET

PART No./REV No: C24091

SHT 1

Francis
SEARCHLIGHTS LIMITED

FOR SLAVE PANEL CONNECTION SEE DRAWING C23949

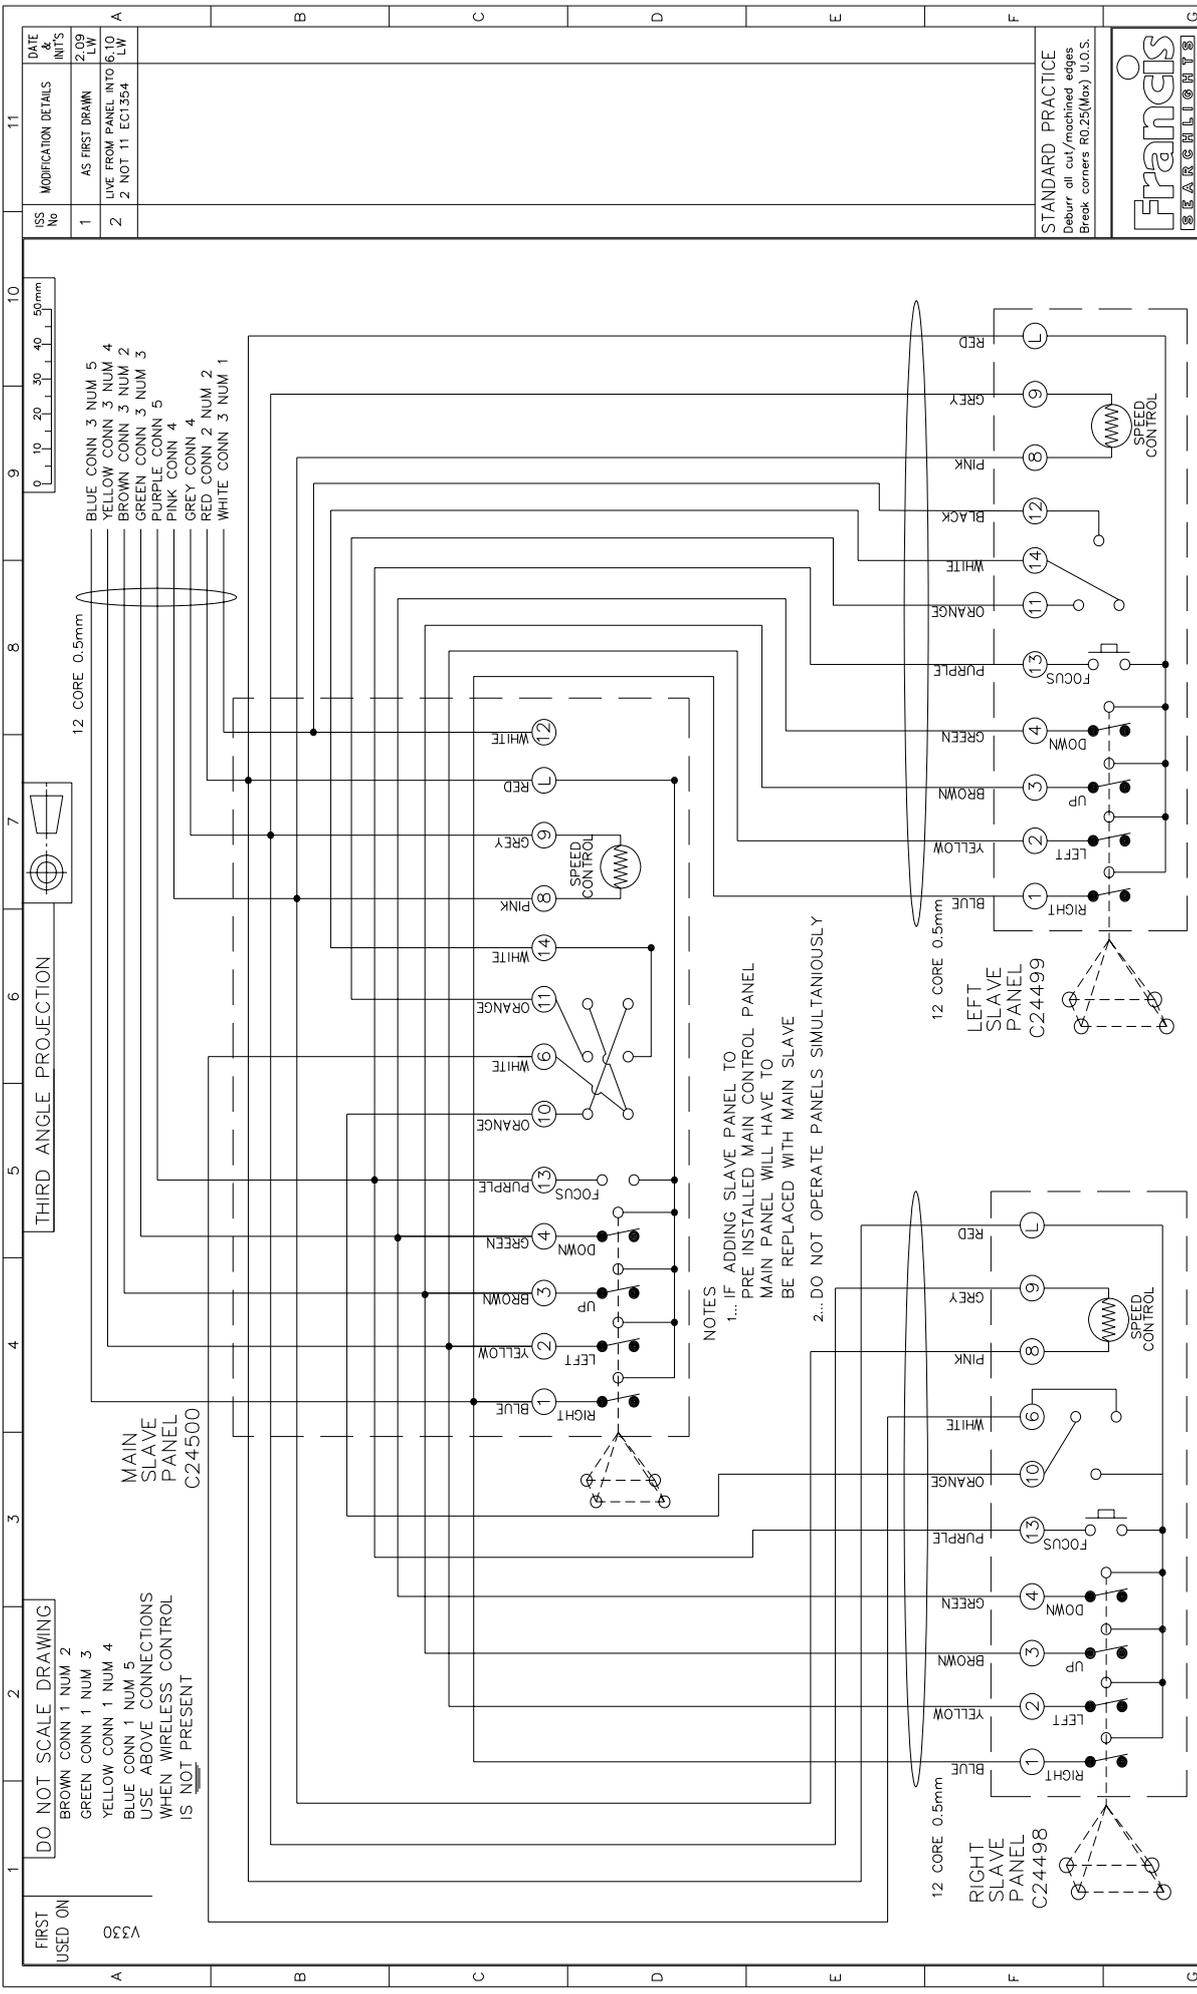

FIRST USED ON

DO NOT SCALE DRAWING

BROWN CONN 1 NUM 2
 GREEN CONN 1 NUM 3
 YELLOW CONN 1 NUM 4
 BLUE CONN 1 NUM 5
 USE ABOVE CONNECTIONS WHEN WIRELESS CONTROL IS NOT PRESENT

12 CORE 0.5mm

BLUE CONN 3 NUM 5
 YELLOW CONN 3 NUM 4
 BROWN CONN 3 NUM 2
 GREEN CONN 3 NUM 3
 PURPLE CONN 5
 PINK CONN 4
 GREY CONN 4
 RED CONN 2 NUM 2
 WHITE CONN 3 NUM 1

MAIN SLAVE PANEL C24500

12 CORE 0.5mm

RIGHT SLAVE PANEL C24498

12 CORE 0.5mm

LEFT SLAVE PANEL C24499

NOTES

1... IF ADDING SLAVE PANEL TO PRE INSTALLED MAIN CONTROL PANEL MAIN PANEL WILL HAVE TO BE REPLACED WITH MAIN SLAVE

2... DO NOT OPERATE PANELS SIMULTANEOUSLY

ISS No	MODIFICATION DETAILS	DATE & INIT'S
1	AS FIRST DRAWN	2.09 LW
2	LIVE FROM PANEL INTO 6.10 2 NOT 11 EC1354	



THIRD ANGLE PROJECTION

STANDARD PRACTICE
 Deburr all cut/machined edges
 Break corners R0.25(Max) U.O.S.



FRANCIS SEARCHLIGHTS LIMITED . UNION ROAD . BOLTON . BL2 2HJ	© 2009 A2 CONT ON SHEET	SHT
Send Casting: To ISO 8062 CT10 MATERIAL Die Casting: To ISO 8062 CT8 Hole centres & posns: ±	PART No./DRG No. C24497	
DRAWN LW DATE 2.09 TOLERANCES Checked SCALE General: ± ALL DIMENSIONS IN MILLIMETRES Angular: ±	DESCRIPTION MULTIPLE SLAVE PANELS WIRING DIAGRAM	


11	10	9	8	7	6	5	4	3	2	1
DATE OF INT'S 4/07/LW										
MODIFICATION DETAILS AS FIRST DRAWN										
ESS No 1										

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

LIGHT IS PRE-WIRED USING CABLE GLANDS TO THE REAR BUT IF PREFERRED CAN BE WIRED THROUGH HOLE IN THE BASE PLATE. BLANKING PLUGS ARE SUPPLIED IF CUSTOMER WISHES TO CHANGE FROM WIRING AT THE REAR.

Ø22mm HOLE IS RECOMMENDED FOR CABLE TO PASS THROUGH IF WIRING THROUGH CENTRE

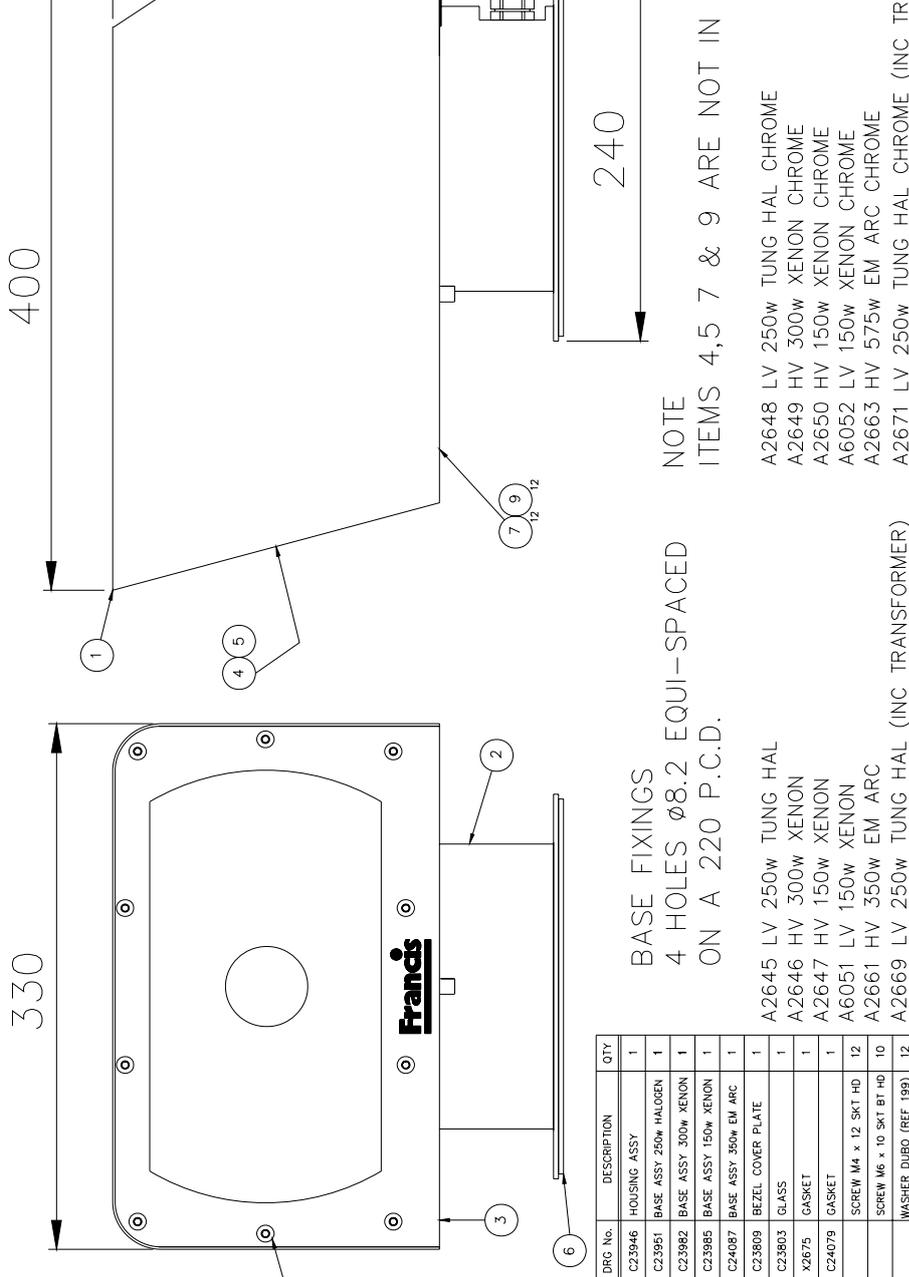

ITEM	PART No.	DRG No.	DESCRIPTION	QTY
1	C23946	C23946	HOUSING ASSY	1
2	C23951	C23951	BASE ASSY 250W HALOGEN	1
2	C23982	C23982	BASE ASSY 300W XENON	1
2	C23985	C23985	BASE ASSY 150W XENON	1
2	C24087	C24087	BASE ASSY 350W EM ARC	1
3	C23809	C23809	BEZEL COVER PLATE	1
4	C23803	C23803	GLASS	1
5	C08855	X2675	GASKET	1
6	C24079	C24079	GASKET	1
7	C16432		SCREW M4 x 12 SKT HD	12
8	C23954		SCREW M6 x 10 SKT BT HD	10
9	C21853		WASHER DUBO (REF 199)	12

BASE FIXINGS
4 HOLES Ø8.2 EQUI-SPACED
ON A 220 P.C.D.

NOTE
ITEMS 4,5 7 & 9 ARE NOT IN VIEW

- A2645 LV 250W TUNG HAL
- A2646 HV 300W XENON
- A2647 HV 150W XENON
- A6051 LV 150W XENON
- A2661 HV 350W EM ARC
- A2669 LV 250W TUNG HAL (INC TRANSFORMER)
- A2648 LV 250W TUNG HAL CHROME
- A2649 HV 300W XENON CHROME
- A2650 HV 150W XENON CHROME
- A6052 LV 150W XENON CHROME
- A2663 HV 575W EM ARC CHROME
- A2671 LV 250W TUNG HAL CHROME (INC TRANSFORMER)

DRAWN	LW	DATE	4.07	TOLERANCES	±
CHECKED		SCALE	1:2	General	±
ALL DIMENSIONS IN MILLIMETRES					
Angular: ±					
Hole centres & posns: ±					
Die Casting: To ISO 8062 C18					
Sand Casting: To ISO 8062 C110					
FINISH					
DESCRIPTION					
VOYAGER 330 HV & LV GA					
PART No./DRG No. A2645					
CONT ON SHEET					
SHT					




FRANCIS SEARCHLIGHTS LIMITED · UNION ROAD · BOLTON · BL2 2HU

© 2007 A2

ISS No	1
DATE & INT'S	6.08 LW
MODIFICATION DETAILS	AS FIRST DRAWN

DATE & INT'S	6.08 LW
MODIFICATION DETAILS	AS FIRST DRAWN

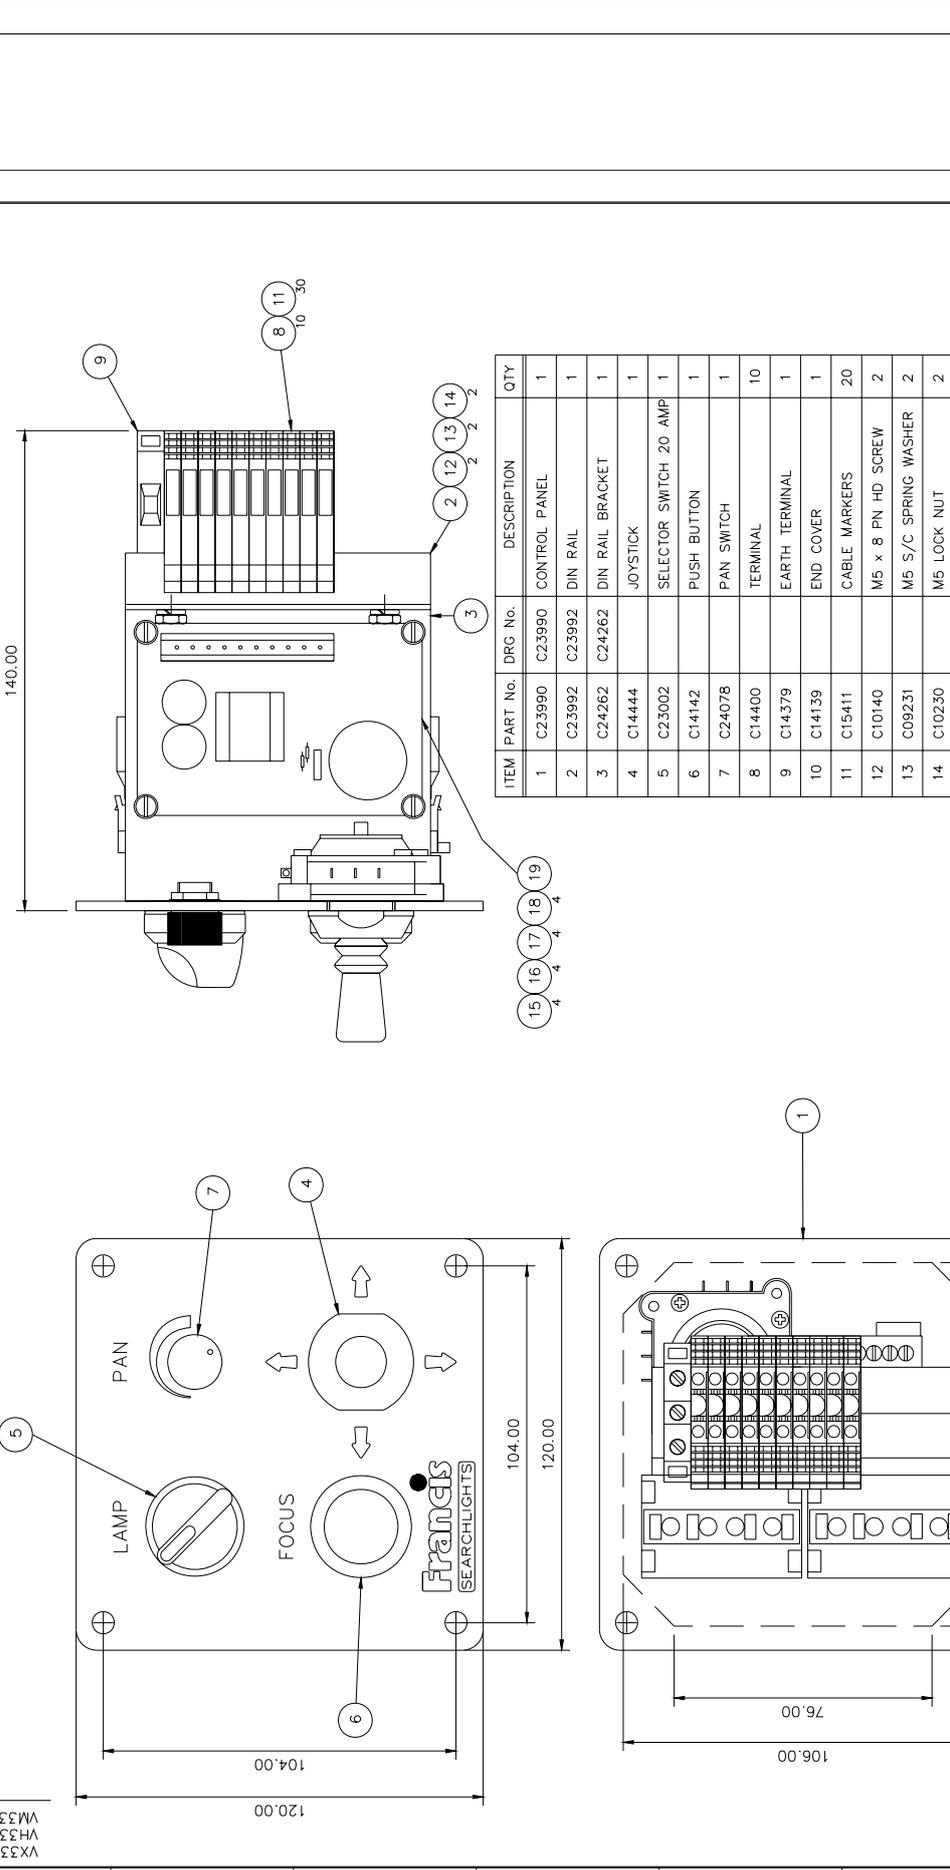

ITEM	PART No.	DRG No.	DESCRIPTION	QTY
1	C23990	C23990	CONTROL PANEL	1
2	C23992	C23992	DIN RAIL	1
3	C24262	C24262	DIN RAIL BRACKET	1
4	C14444		JOYSTICK	1
5	C23002		SELECTOR SWITCH 20 AMP	1
6	C14142		PUSH BUTTON	1
7	C24078		PAN SWITCH	1
8	C14400		TERMINAL	10
9	C14379		EARTH TERMINAL	1
10	C14139		END COVER	1
11	C15411		CABLE MARKERS	20
12	C10140		M5 x 8 PN HD SCREW	2
13	C09231		M5 S/C SPRING WASHER	2
14	C10230		M5 LOCK NUT	2
15	C14502		M3 x 6 PN HD SCREW	4
16	C10747		M3 S/C SPRING WASHER	4
17	C12350		M3 NYLOC NUT	4
18	C16591		M3 NYLON PILLAR	4
19	C24236		MOTOR SPEED CONTROL	1

STANDARD PRACTICE
Deburr all cut/machined edges
Break corners R0.25(Max) U.O.S.

FRANCIS SEARCHLIGHTS LIMITED . UNION ROAD . BOLTON . BL2 2HJ

© 2008 A2 CONT ON SHEET

PART No./DRG No. C24263 1

CONTROL PANEL ASSEMBLY (WITHOUT WIRELESS)

FINISH MATERIAL

Sand Casting: To ISO 8062 CT10
Die Casting: To ISO 8062 CT8

TOLERANCES
General: ± 0.2
Angular: ±

Hole centres & posns: ±

ALL DIMENSIONS IN MILLIMETRES

SCALE 1:1

DATE 6.08

DRAWN LW

CHECKED

USED ON
VM330
VM330
VM330
VM330

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

140.00

104.00

120.00

106.00

76.00

76.00

106.00

0 10 20 30 40 50mm

1 2 3 4 5 6 7 8 9 10 11

A B C D E F G

1 2 3 4 5 6 7 8 9 10 11

1 2 3 4 5 6 7 8 9 10 11



ISS No	1	DATE & INIT'S	8.07 LW
MODIFICATION DETAILS	AS FIRST DRAWN		



ITEM	PART No.	DRG No.	DESCRIPTION	QTY
1	C24191	C24191	CONTROL PANEL	1
2	C23992	C23992	DIN RAIL	1
3	C24192	C24192	DIN RAIL BRACKET	1
4	C14444		JOYSTICK	1
5	C22941		TOGGLE SWITCH	1
6	C14142		PUSH BUTTON	1
7	C24078		PAN SWITCH	1
8	C14400		TERMINAL	10
9	C14379		EARTH TERMINAL	1
10	C14139		END COVER	1
11	C15411		CABLE MARKERS	20
12	C13351		M5 x 10 HEX HD SCREW	2
13	C09231		M5 S/C SPRING WASHER	2
14	C08352		M5 FULL NUT	2

BOTH PANEL ASSY ARE IDENTICAL APART FROM WIRING SEE C23949 FOR DETAILS

WHEN WIRED PLEASE IDENTIFY MAIN SLAVE & SLAVE WITH REMOVABLE LABEL

C23976 SLAVE PANEL ASSY
C24197 MAIN SLAVE PANEL ASSY

FRANCIS SEARCHLIGHTS LIMITED · UNION ROAD · BOLTON · BL2 2HJ	© 2007 A2	CONT ON SHEET
FINISH	PART No./DRG No.	SHT
		C23976 1

DRAWN LW	DATE 8.07	TOLERANCES	Sand Casting: To ISO 8062 CT10
CHECKED	SCALE 1:1	General: ± 0.2	Die Casting: To ISO 8062 CT8
ALL DIMENSIONS IN MILLIMETRES		Angular: ±	Hole centres & posns: ±

FIRST USED ON	VM330
	VM330
	VM330

DO NOT SCALE DRAWING	THIRD ANGLE PROJECTION
----------------------	------------------------

STANDARD PRACTICE
Debur all cut/machined edges
Break corners R0.25(Max) U.O.S.

Francis
SEARCHLIGHTS


FIRST USED ON
A2645
VH330

DO NOT SCALE DRAWING

THIRD ANGLE PROJ




ISS No	1	DATE & INIT'S	6.08 LW
MODIFICATION DETAILS	AS FIRST DRAWN		

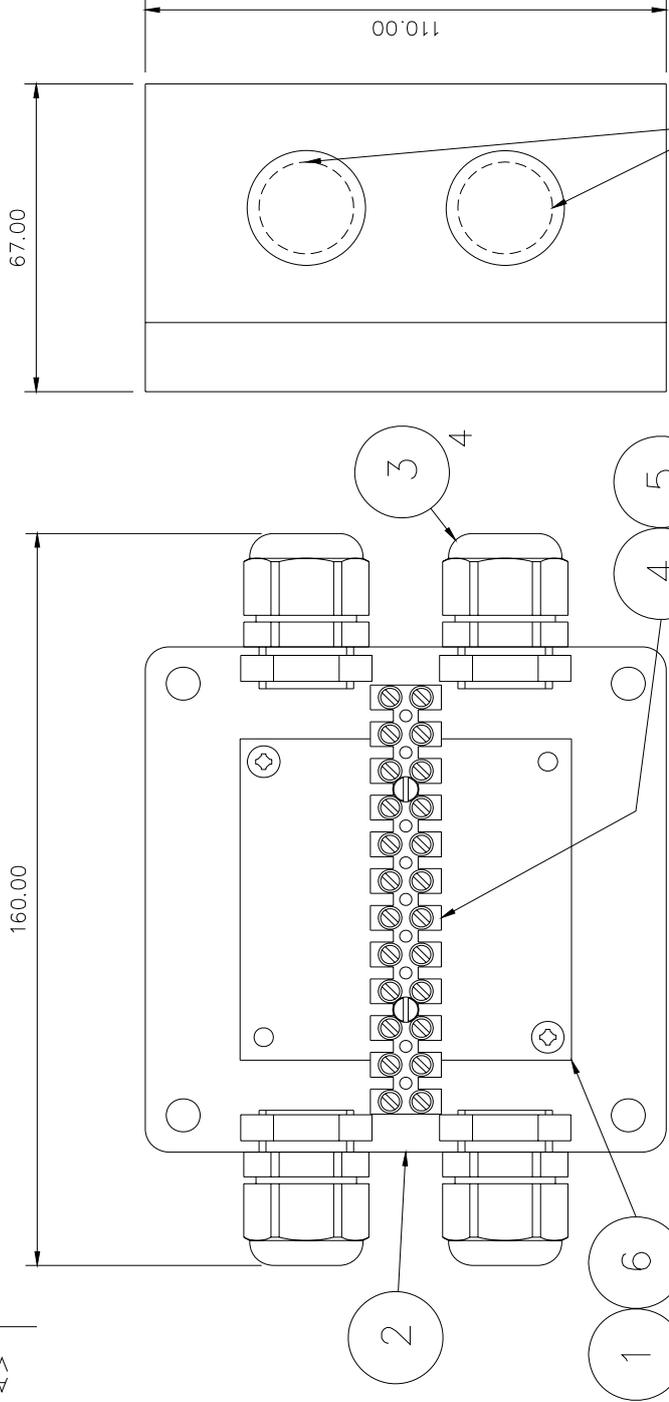

REF	PART No.	DRG. No.	DESCRIPTION	QTY
1	C24260-01	C24260	TERMINAL PLATE PLATE ASSY	1
2	C23709-00	—	JUNCTION BOX	4
3	C10158-00	—	CABLE GLAND	1
4	C15056-00	—	TERMINAL BLOCK	2
5	C10203-00	—	M3 x 16 PN HD SCREW	2
6	C23958-00	—	M4 x 8 POZI HD SCREW	2


REMOVE THE FOUR 20mm KNOCKOUTS AS SHOWN BY DOTTED LINE GLANDS NOT SHOWN

STANDARD PRACTICE
Deburr all cut/machined edges
Break corners R0.25(Max) U.O.S.
TOLERANCES U.O.S: -
General: ± 0.25
Angular: ±
Hole centres & posns: ± 0.125
Sand Casting: To ISO 8062 CT10
Die Casting: To ISO 8062 C18



©2008 A3 CONT ON SHEET

DRAWN	LW	DATE	6.08	MATERIAL		FINISH	
CHECKED		SCALE	1.1				
ALL DIMENSIONS IN MILLIMETRES							
PART No./DRG No.				C24261			
DESCRIPTION				JUNCTION BOX ASSY			
SHT				1			

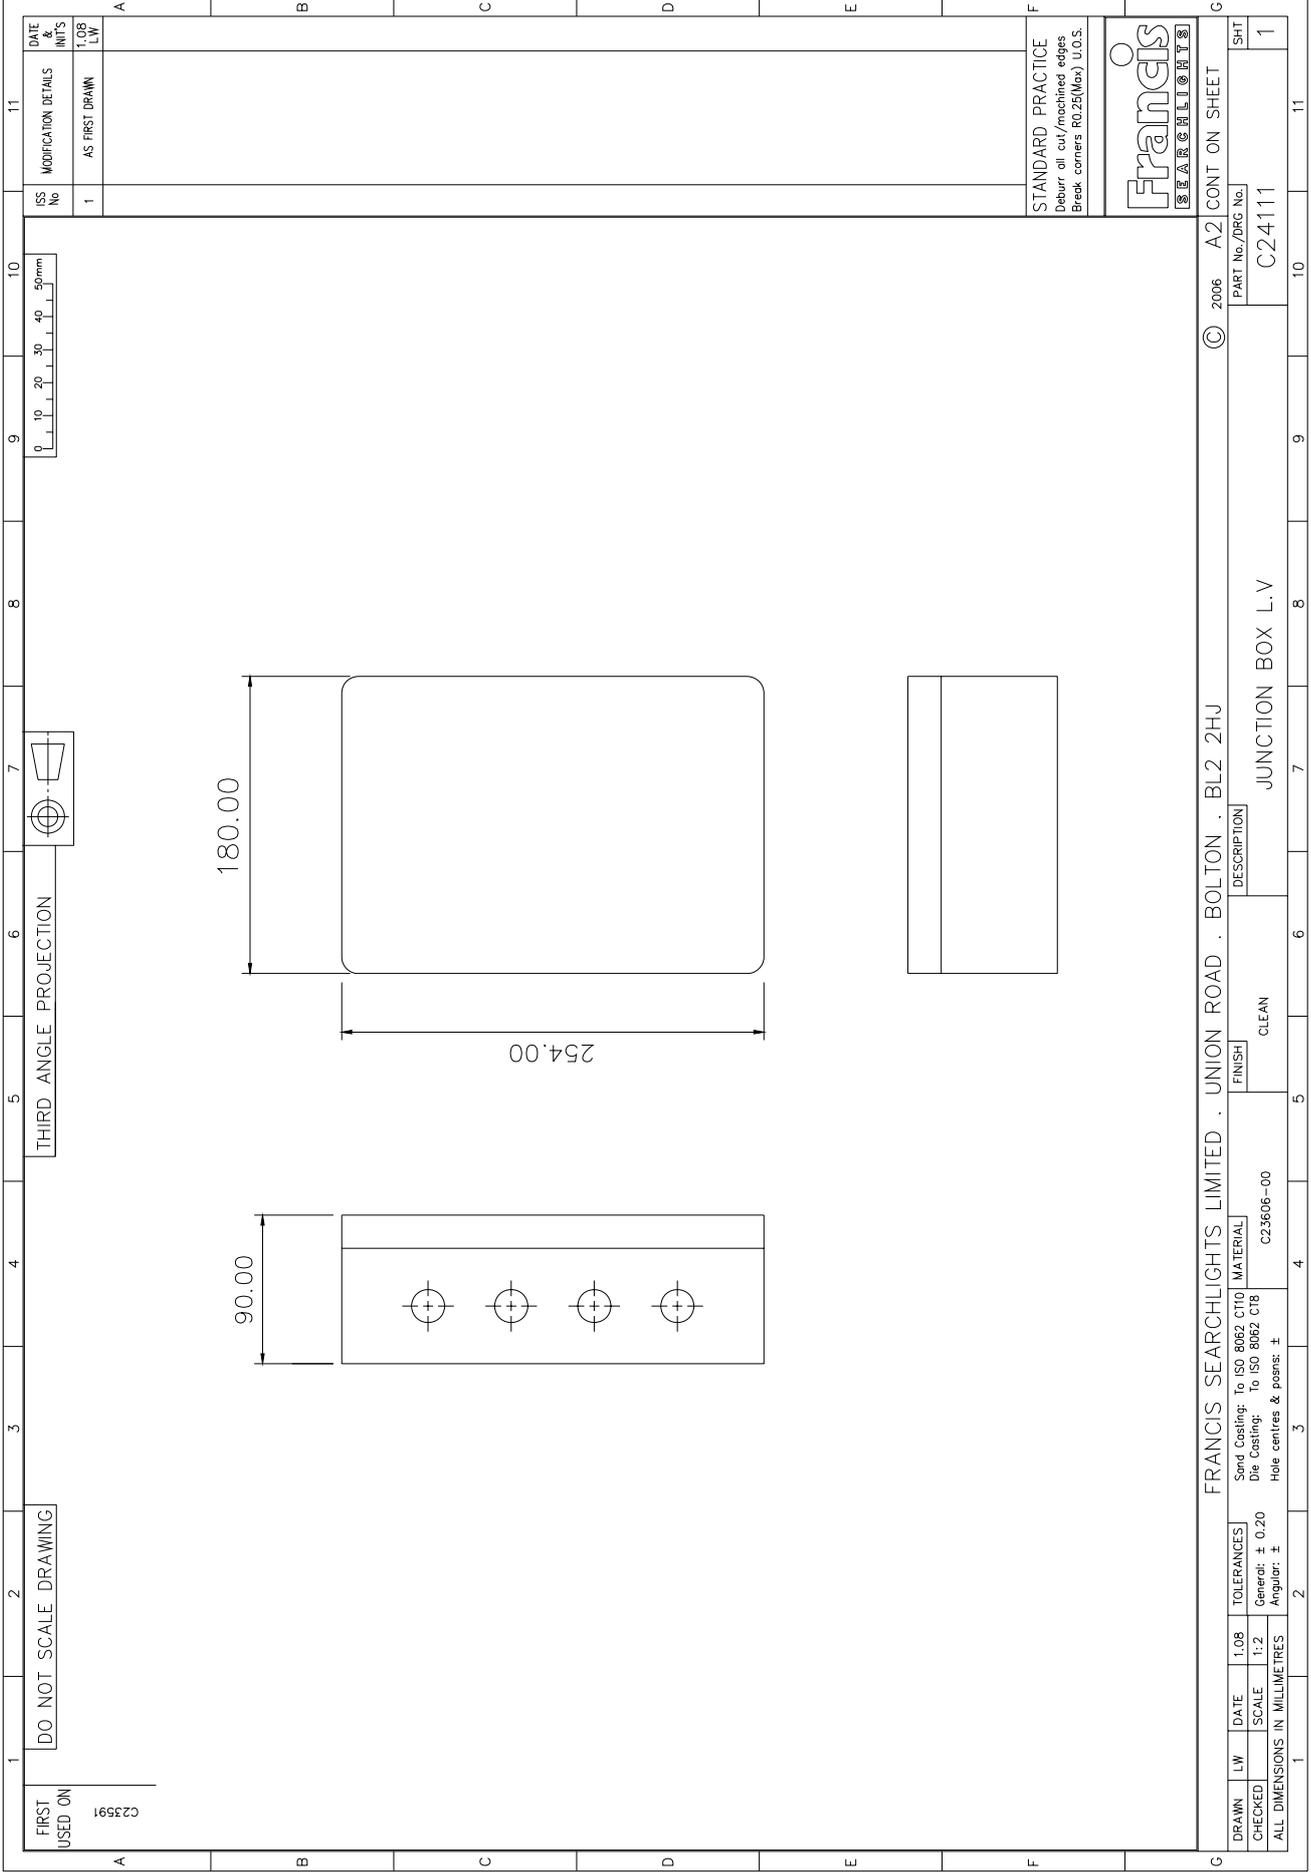

1	2	3	4	5	6	7	8	9	10	11
---	---	---	---	---	---	---	---	---	----	----

DATE & INIT'S	MODIFICATION DETAILS	ISS No
1.08 LW	AS FIRST DRAWN	1


DATE	1.08
SCALE	1:2
SCALE	1:2
GENERAL TOLERANCES	General: ± 0.20
ANGULAR TOLERANCES	Angular: ±
MATERIAL	C23606-00
FINISH	CLEAN
DESCRIPTION	JUNCTION BOX L.V
PART No./DRG No.	C2411
SHT	1

STANDARD PRACTICE
 Deburr all cut/machined edges
 Break corners R0.25(Max) U.O.S.



FRANCIS SEARCHLIGHTS LIMITED · UNION ROAD · BOLTON · BL2 2HU	© 2006	A2	CONT ON SHEET
DO NOT SCALE DRAWING	THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING	THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION

1	2	3	4	5	6	7	8	9	10	11
---	---	---	---	---	---	---	---	---	----	----

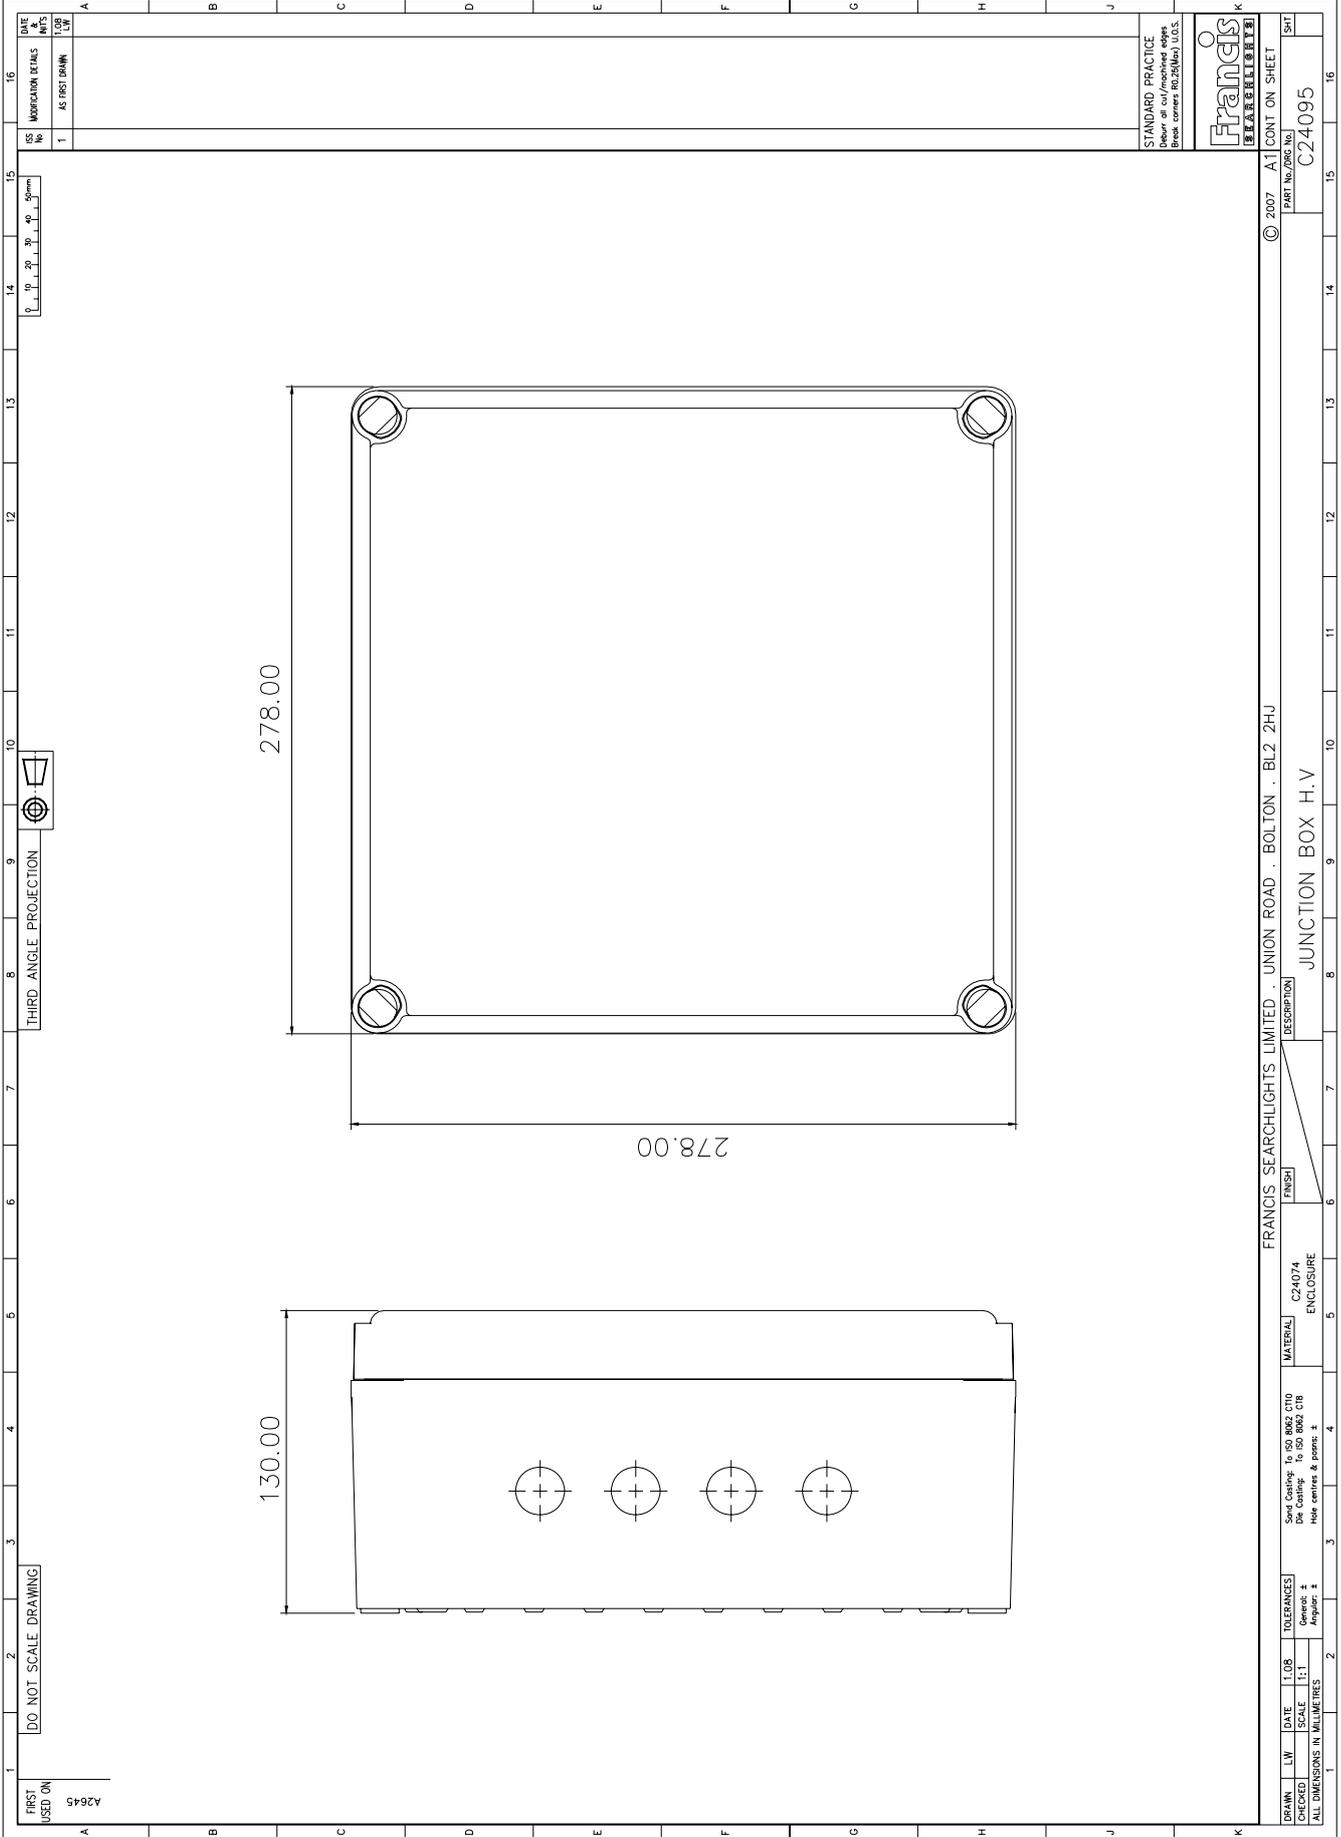

DATE	16
Modification No.	
IS	
No	
1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

1	
AS FIRST DRAWN	
DATE	
BY	
CHKD	
APP'D	
DATE	
BY	
CHKD	
APP'D	

STANDARD PRACTICE
 Detail all un-fabricated edges.
 Break corners R0.25(Min) U.O.S.

© 2007 A1 CONT ON SHEET
 PART No./ORG No.
 C24095

FRANCIS SEARCHLIGHTS LIMITED . UNION ROAD . BOLTON . BL2 2HU
 JUNCTION BOX H.V

DESCRIPTION

FINISH

MATERIAL C24074
 ENCLOSURE

Scale Conting: to ISO 8002 C/D
 Die Conting: to ISO 8002 C/B
 Hole centre & points: ±

TOLERANCES
 General: ±
 Angular: ±

DATE 1.08
 SCALE 1:1
 ALL DIMENSIONS IN MILLIMETRES

DRAWN LW
 CHECKED

DATE 1.08
 SCALE 1:1
 ALL DIMENSIONS IN MILLIMETRES

DRAWN LW
 CHECKED

DATE 1.08
 SCALE 1:1
 ALL DIMENSIONS IN MILLIMETRES

DRAWN LW
 CHECKED

10 - Spare Parts List

The following spare parts can be ordered directly from the manufacturer:

Part Number	Description
D9851	24v 250w 300HRS GX6.35 Tungsten Halogen Lamp
D4695	24v 250w 2000HRS GX6.35 Tungsten Halogen Lamp
C16878-00	Lampholder GX6.35
C23002-00	Switch 20A - On/Off
C14142-00	Switch – Focus
C14444-00	Joystick
C24078-00	Switch (Controller/Speed)
C23803-00	Front Glass
C08835-00	Front Glass Gasket
C16410-00	24v Motor – Focus and Tilt
C23802-00	Reflector
C22268-01	Breather Assy
C24089-01	Pan Motor Assy
C22382-00	Microswitch with lever
C24000-00	Speed Controller
C23960-00	Wireless Motor Control Unit
C24236-00	Motor Control Unit
C24071-00	Transformer
C24072-00	Rectifier
C23805-00	Relay
C23969-01	Sensor Block Assembly
C21567-00	Heater
C24079-00	Mounting Base Gasket
C23961-01	Wireless Key Pad

In order to prolong the life and performance of your product, we recommend that you only specify Francis Searchlights spare parts. This will ensure that any warranties on your equipment will not be invalidated.

When ordering spare parts please contact the Sales Department at Francis Searchlights Limited. Please quote searchlight model and serial number at all times. This will enable a fast response to your spares' requirements.



[Back To Top](#)