



FSP300 Issue 6  
Tungsten Halogen  
Signalling – 300mm

## APPLICATION

The FRANCIS FSP300 Signalling Searchlight is available with either Deck (D) or Deck Pedestal (DP) mountings and is suitable for most vessels that require permanently mounted day/night visual signalling equipment.

Standard features include, adjustable focus mechanism and combined tubular and V sights.


The well proven shutter mechanism can be locked in the "open" position allowing the FSP300 to be used as a Searchlight.

PART NUMBERS			
Type	Supply	Weight	Part Number
FSP300 D	12/24v	19.3 Kg	A4184
FSP300 DP	12/24v	23.9 Kg	A4186
FSP300 D	110/240v	19.3 Kg	A4185
FSP300 DP	110/240v	23.9 Kg	A4187
FSP300D (300w)	110/240v	19.3 kg	A4188
FSP300 DP (300w)	110/240v	19.3kg	A4189

## SPECIFICATION

- All brass construction.
- Stove enamel paint finish.
- Tungsten Halogen light source.
- Parabolic glass reflector.
- Toughened front glass.
- Removable front and rear bezels.
- External lamp focus adjustment.
- Full 360° rotation.
- Vertical movement -45° to +45°
- Sealing to IP56.
- Supply cable fitted – 3 metres.

Volts	Watts	Range @ 1 Lux	P.B.C.P. x 1000	Div. *	Lamp Life	Lamp Cap	Lamp Part Number
12v	100w	1019 M	1038	2.0°	2000 hrs	GX6.35	D9848
24v	150w	1106 M	1224	2.0°	300 hrs	GX6.35	D14795
24v	250w	1298 M	1685	3.0°	2000 hrs	GX6.35	D4695
24v	250w	1563 M	2442	3.0°	300 hrs	GX6.35	D9851
230v	300w	580 M	337	3.0°	75 hrs	GX6.35	D16841
230v	650w	950 M	902	5.0°	750 hrs	GX9.5	D1813
115v	300w	597M	356	3.0°	150 hrs	GX6.35	D16883
115v	1000w	1049 M	1100	5.0°	750 hrs	GX9.5	D1809
230v	1000w	1017 M	1034	5.0°	750 hrs	GX9.5	D6715

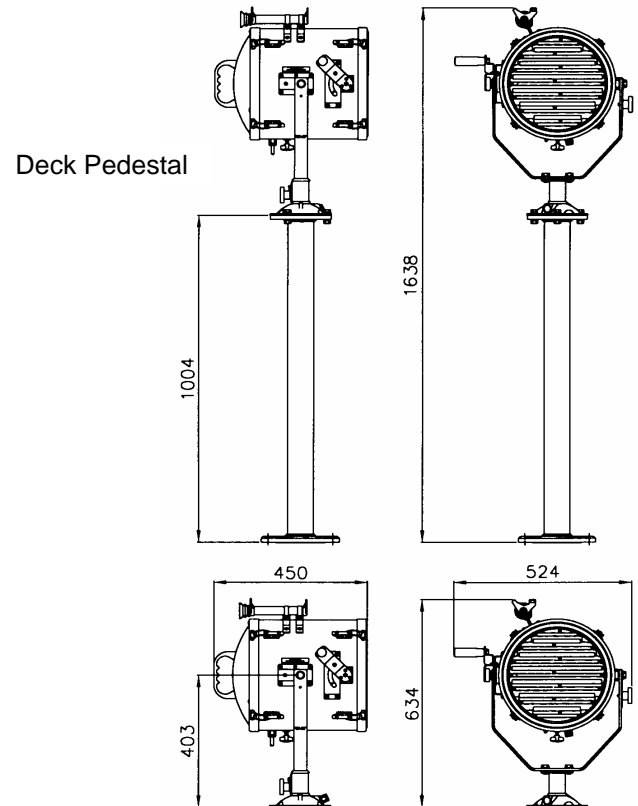

Deck

All dimensions in Millimeters

### Base fixings

Deck - 3 holes Ø11.0 on a 154 PCD

Deck Pedestal – 4 holes Ø12.5 on a 190 PCD.

For more information contact:

Francis Searchlights Limited  
Union Road, Bolton, BL2 2HJ, UK  
Tel 44 (0) 1204 558960 Fax 44 (0) 1204 558979  
Email sales@francis.co.uk Web site www.francis.co.uk